




TOP VIEW

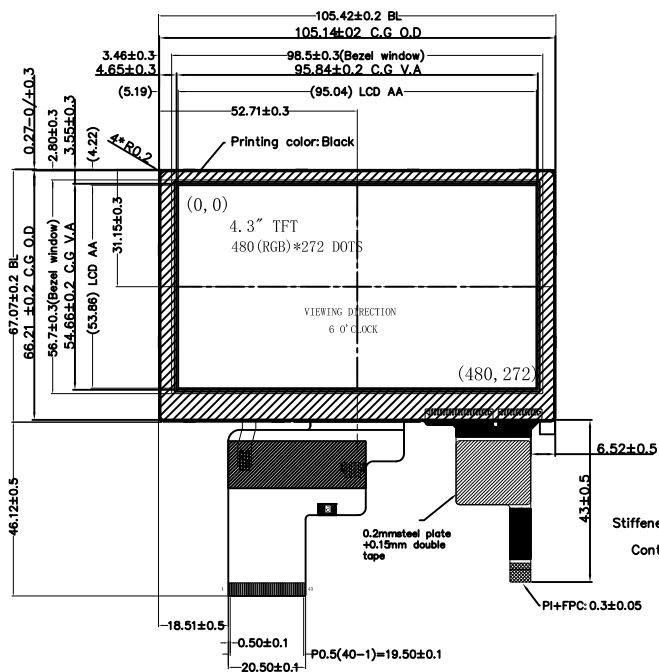

SIDE VIEW

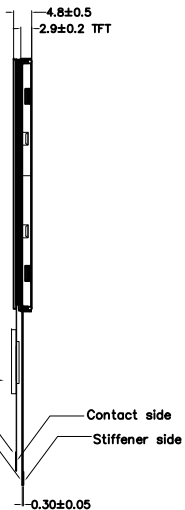

BOTTOM VIEW

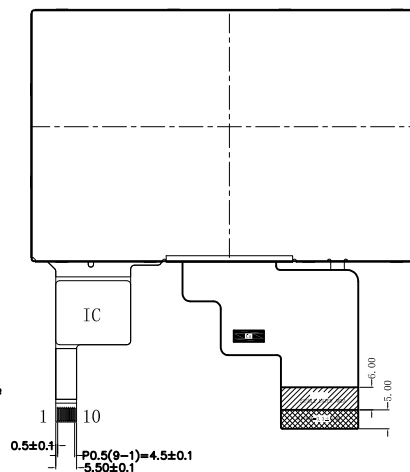

REV	DC/EC NUMBER	DESCRIPTION	DATE

PIN DESCRIPTION

PIN#	ASSIGNMENT
1	LEDK
2	LEDA
3	GND
4	VCC
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DEN
35	NC
36	GND
37	NC
38	NC
39	NC
40	NC

LED CIRCUIT:



NOTES FOR TFT:

1. DISPLAY TYPE:65/262K Colors LCD, Transmissive, Normal White
2. OPERATING TEMP. : -20° C~70° C
3. STORAGE TEMP. : -30° C~80° C
4. LCD DRIVER: ST7257
5. BACKLIGHT: 12CHIP-WHITE LED, Parallel connection
If=40mA , VAK=19. 2V, Brightness:600cd/m² TYP (WITH CTP).
6. UNMARKED TOLERANCE: ±0. 2
7. ROHS COMPLAIN

NOTE FOR CTP:

- 1.POWER SUPPLY:DC=3.3V,Interface:I2C
- 2.SURFACE HARDNESS: 6H
- 3.TOP: -20°C~+70°C
- 4.TST: -30°C~+80°C
- 5.TRANSMITTANCE: ≥86%
- 6.STRUCTURE:COVER+ITO GLASS
- 7.IC: FT5316
- 8.ROHS
- 9.UNMARKED TOLERANCE:±0.2

PIN#	ASSIGNMENT
1	NC
2	NC
3	RST
4	GND
5	INT
6	SDA
7	SCL
8	GND
9	GND
10	VDD

CONTROL DIMENSION:		XINSUN DISPLAY INTEGRATION	
REFERENCE DIMENSION: ()		XINSUN DISPLAY INTEGRATION	
APPROVED:	JOB	MODEL NAME	3rd ANGLE
CHECKED:	ERIC	PART NAME	UNIT mm
DESIGNED:	ISSCA	DRAWING NUMBER	SCALE 1:1
		MATERIAL NUMBER	PAGE 1/1