
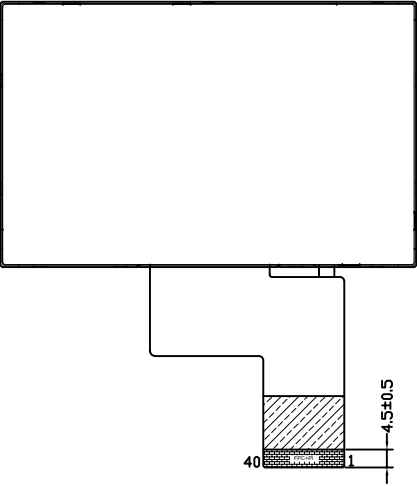
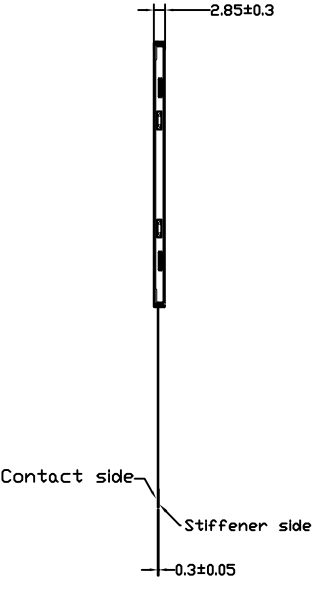


REV	DC/EC NUMBER	DESCRIPTION	DATE


TOP VIEW

SIDE VIEW

BOTTOM VIEW

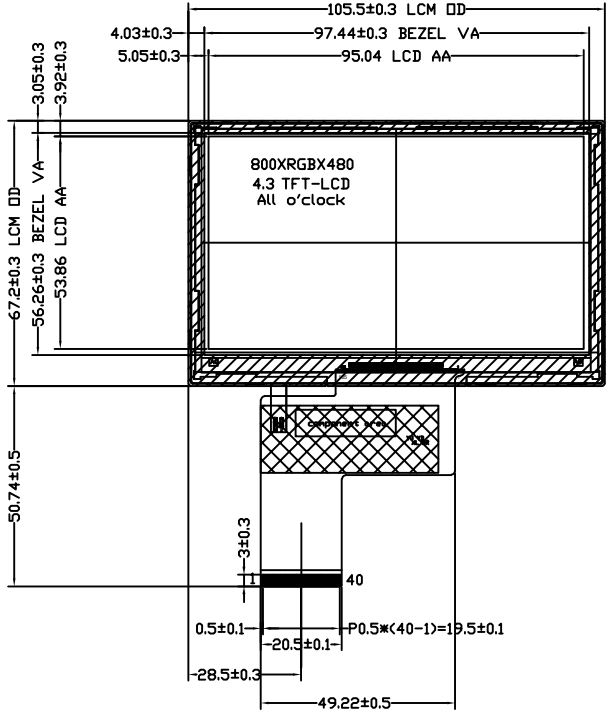

BACKLIGHT DIAGRAM

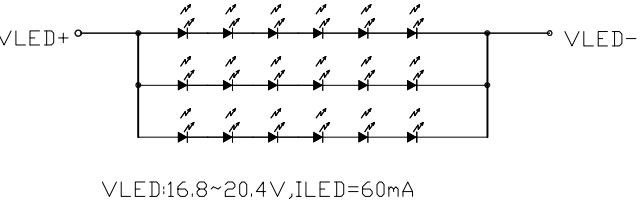

PIN FUNCTION

PIN	description
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYSN
34	DE
35	NC
36	GND
37	NC(XR)
38	NC(YD)
39	NC(XL)
40	NC(YU)

- NOTE:
- 1.DISPLAY TYPE:4.3"800RGB*480 IPS TFT,TRANSMISSIVE,NORMALLY BLACK
 - 2.DRIVER IC: ST7262 OR Equivalent
 - 3.VIEWING DIRECTION:ALL O'CLOCK
 - 4.OPERATING TEMPERATURE:-20°C~+70°C.
 - 5.STORAGE TEMPERATURE:-30°C~+80°C.
 - 6.BACKLIGHT TYPE:10 WHITE LEDS.
 - 7.LED:ILED=60mA at VF=16.8~20.4V (CONSTANT CURRENT).
 - 8.MODULE BRIGHTNESS: 1000cd/m2 typ.
 - 9.MUST MEET THE REQUIREMENT OF ROHS

CONTROL DIMENSION:		XINSUN DISPLAY INTEGRATION	
REFERENCE DIMENSION:		XINSUN DISPLAY INTEGRATION	
APPROVED:	JOBS	MODEL NAME	3rd ANGLE
CHECKED:	ERIC	PART NAME	UNIT
DESIGNED:	ISSCA	DRAWING NUMBER	SCALE
		MATERIAL NUMBER	PAGE
			1/1