
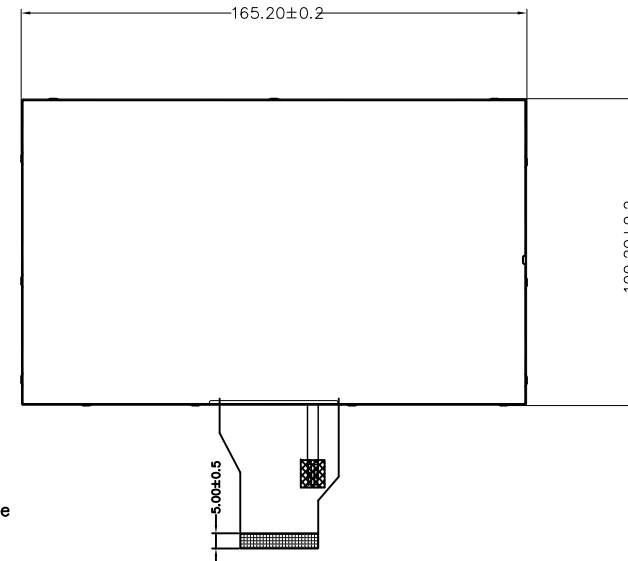



REV	DC/EC NUMBER	DESCRIPTION	DATE
V01	DR19010201-1	1.Added the viewing angle 2.Changed the LED circuit	2020.01.02
V01	DR21032301-2	1.Changed the LED circuit	2021.03.23

TFT I/F

PIN	ASSIGNMENT
1	LEDA
2	LEDA
3	LEDK
4	LEDK
5	GND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VS
11	HS
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DCLK
38	GND
39	L/R
40	U/D
41	VGH
42	VGL
43	AVDD
44	RESET
45	NC
46	VCOM
47	DITHB
48	GND
49	NC
50	NC

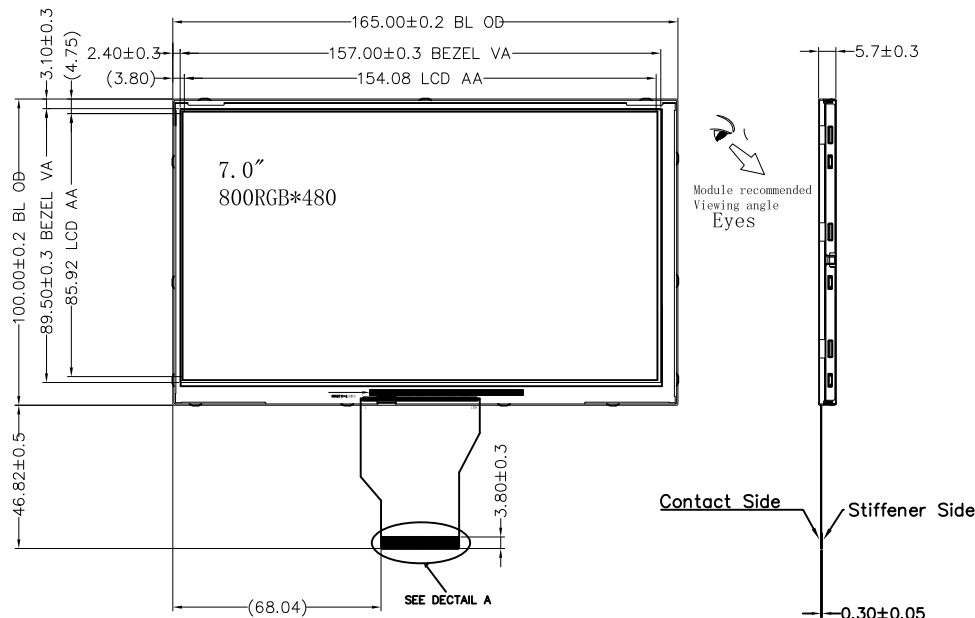

LED CIRCUIT

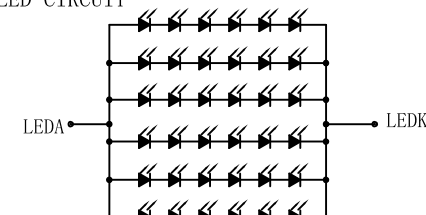

VF=17.4~19.8V, IF=240mA(Fix)

TFT NOTE:

1. LCD TYPE: 16.7M COLOR ,TFT: TN,TRANSMISSIVE,NORMAL WHITE
2. VIEWINGDIRECTION: 80°U/70°D/80°L/80°R
3. Driver IC: EK9713+EK73002 or equivalent
3. BACKLIGHT: VF=17.4V~19.8V,IF=240mA(FIX)
4. Brightness: 1500cd/m2 TYP.
5. OPERATION TEMP: -20°~70°
6. STORAGE TEMP: -30°~80°
7. UNMARKERTOLERANCE: ±0.2

CONTROL DIMENTION:		XINSUN DISPLAY INTEGRATION			
REFERENCE DIMENTION:	()				
APPROVED:	JOBS		MODEL NAME	3rd ANGLE	
CHECKED:	ERIC		PART NAME	UNIT	mm
DESIGNED:	ISSCA		DRAWING NUMBER	SCALE	1:1
			MATERIAL NUMBER	PAGE	1/1