
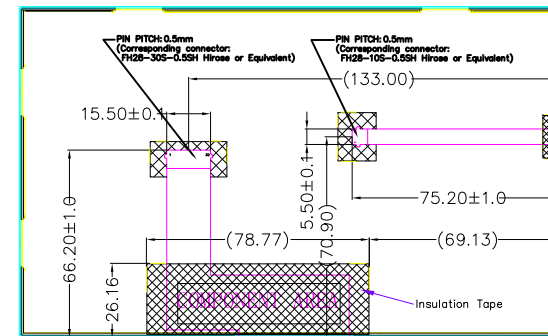



REV	DC/EC NUMBER	DESCRIPTION	DATE

TOP VIEW

SIDE VIEW

BOTTOM VIEW

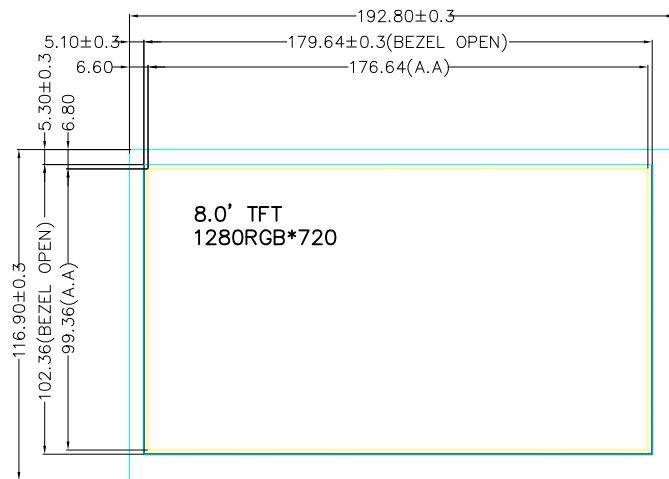

BL I/F

PIN	SYMBOL
1	A1
2	A2
3	A3
4	NC
5	NTC+
6	NTC-
7	NC
8	C3
9	C2
10	C1

TFT I/F

PIN	SYMBOL
1	NC
2	VDD
3	VDD
4	GND
5	RESET
6	STBYB
7	GND
8	SDA
9	SCL
10	CSB
11	GND
12	TB
13	RL
14	GND
15	LVON
16	LVOP
17	GND
18	LV1N
19	LV1P
20	GND
21	LV2N
22	LV2P
23	GND
24	CLKN
25	CLKP
26	GND
27	LV3N
28	LV3P
29	GND
30	VDDOT

NOTES:

1. DISPLAY TYPE: 8.0"1280RGB*720 TFT,NORMALLY BLACK
2. VIEWING DIRECTION : U/L/D/R 85/85/85/85
3. Driver IC : TBD
4. Top : -30°C ~ 85°C, Tst : -40°C ~ 90°C
5. GENERAL TOLERANCE: ±0.2mm
6. LCM Luminance: 800cd/m² (Typical)

Backlight LED Circuit

BL V=23V I=285mA

A1+ ◯ ▢ ▢ ▢ ▢ ▢ ▢ ▢ ▢ ◯ C1-

A2+ ◯ ▢ ▢ ▢ ▢ ▢ ▢ ▢ ▢ ◯ C2-

A3+ ◯ ▢ ▢ ▢ ▢ ▢ ▢ ▢ ▢ ◯ C3-

NTC+ ◯ — NCP15XH103F0SR6 ◯ NTC-

CONTROL DIMENTION:		XINSUN DISPLAY INTEGRATION	
REFERENCE DIMENTION:		()	
APPROVED:	JOBS	MODEL NAME	3rd ANGLE
CHECKED:	ERIC	PART NAME	UNIT
DESIGNED:	ISSCA	DRAWING NUMBER	SCALE
		PETERIAL NUMBER	PAGE
			1/1