



REV	DC/EC NUMBER	DESCRIPTION	DATE


TOP VIEW

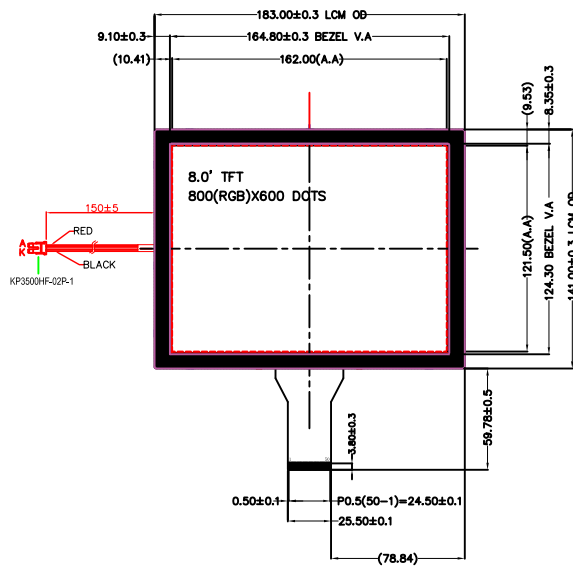

SIDE VIEW

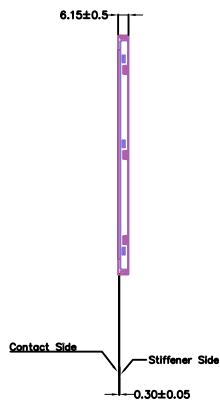

BOTTOM VIEW

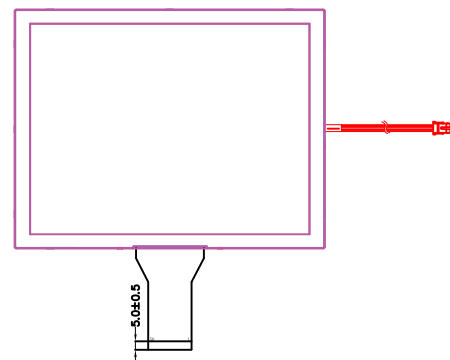


TFT I/F	PIN SYMBOL
1	NC
2	NC
3	NC
4	NC
5	GND
6	VCOM
7	VCC
8	MODE
9	DE
10	VS
11	HS
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DCLK
38	GND
39	L/R
40	U/D
41	VGH
42	VGL
43	AVDD
44	RESET
45	NC
46	VCOM
47	DITHB
48	GND
49	NC
50	NC

NOTE FOR TFT

1. DISPLAY TYPE: 8.0" 800RGB*600 TN TFT, TRANSMISSIVE, NORMALLY WHITE
2. VIEWING DIRECTION : U/L/D/R 70/75/75/75
3. Driver IC : TBD
4. Top : -20°C ~ 70°C, Tst : -30°C ~ 80°C
5. GENERAL TOLERANCE: ±0.2
6. LCM Luminance: 1000cd/m2 (Typical)

Backlight LED Circuit

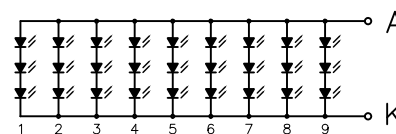

VAK=7.8V~9.9V, ILED=540mA(FIX)

CONTROL DIMENTION:		XINSUN DISPLAY INTEGRATION	
REFERENCE DIMENTION:	()	MODEL NAME	3rd ANGLE
APPROVED:	JOBS	PART NAME	UNIT
CHECKED:	ERIC	DR21052701-1 V00	SCALE
DESIGNED:	ISSCA	MATERIAL NUMBER	PAGE
			1/1