


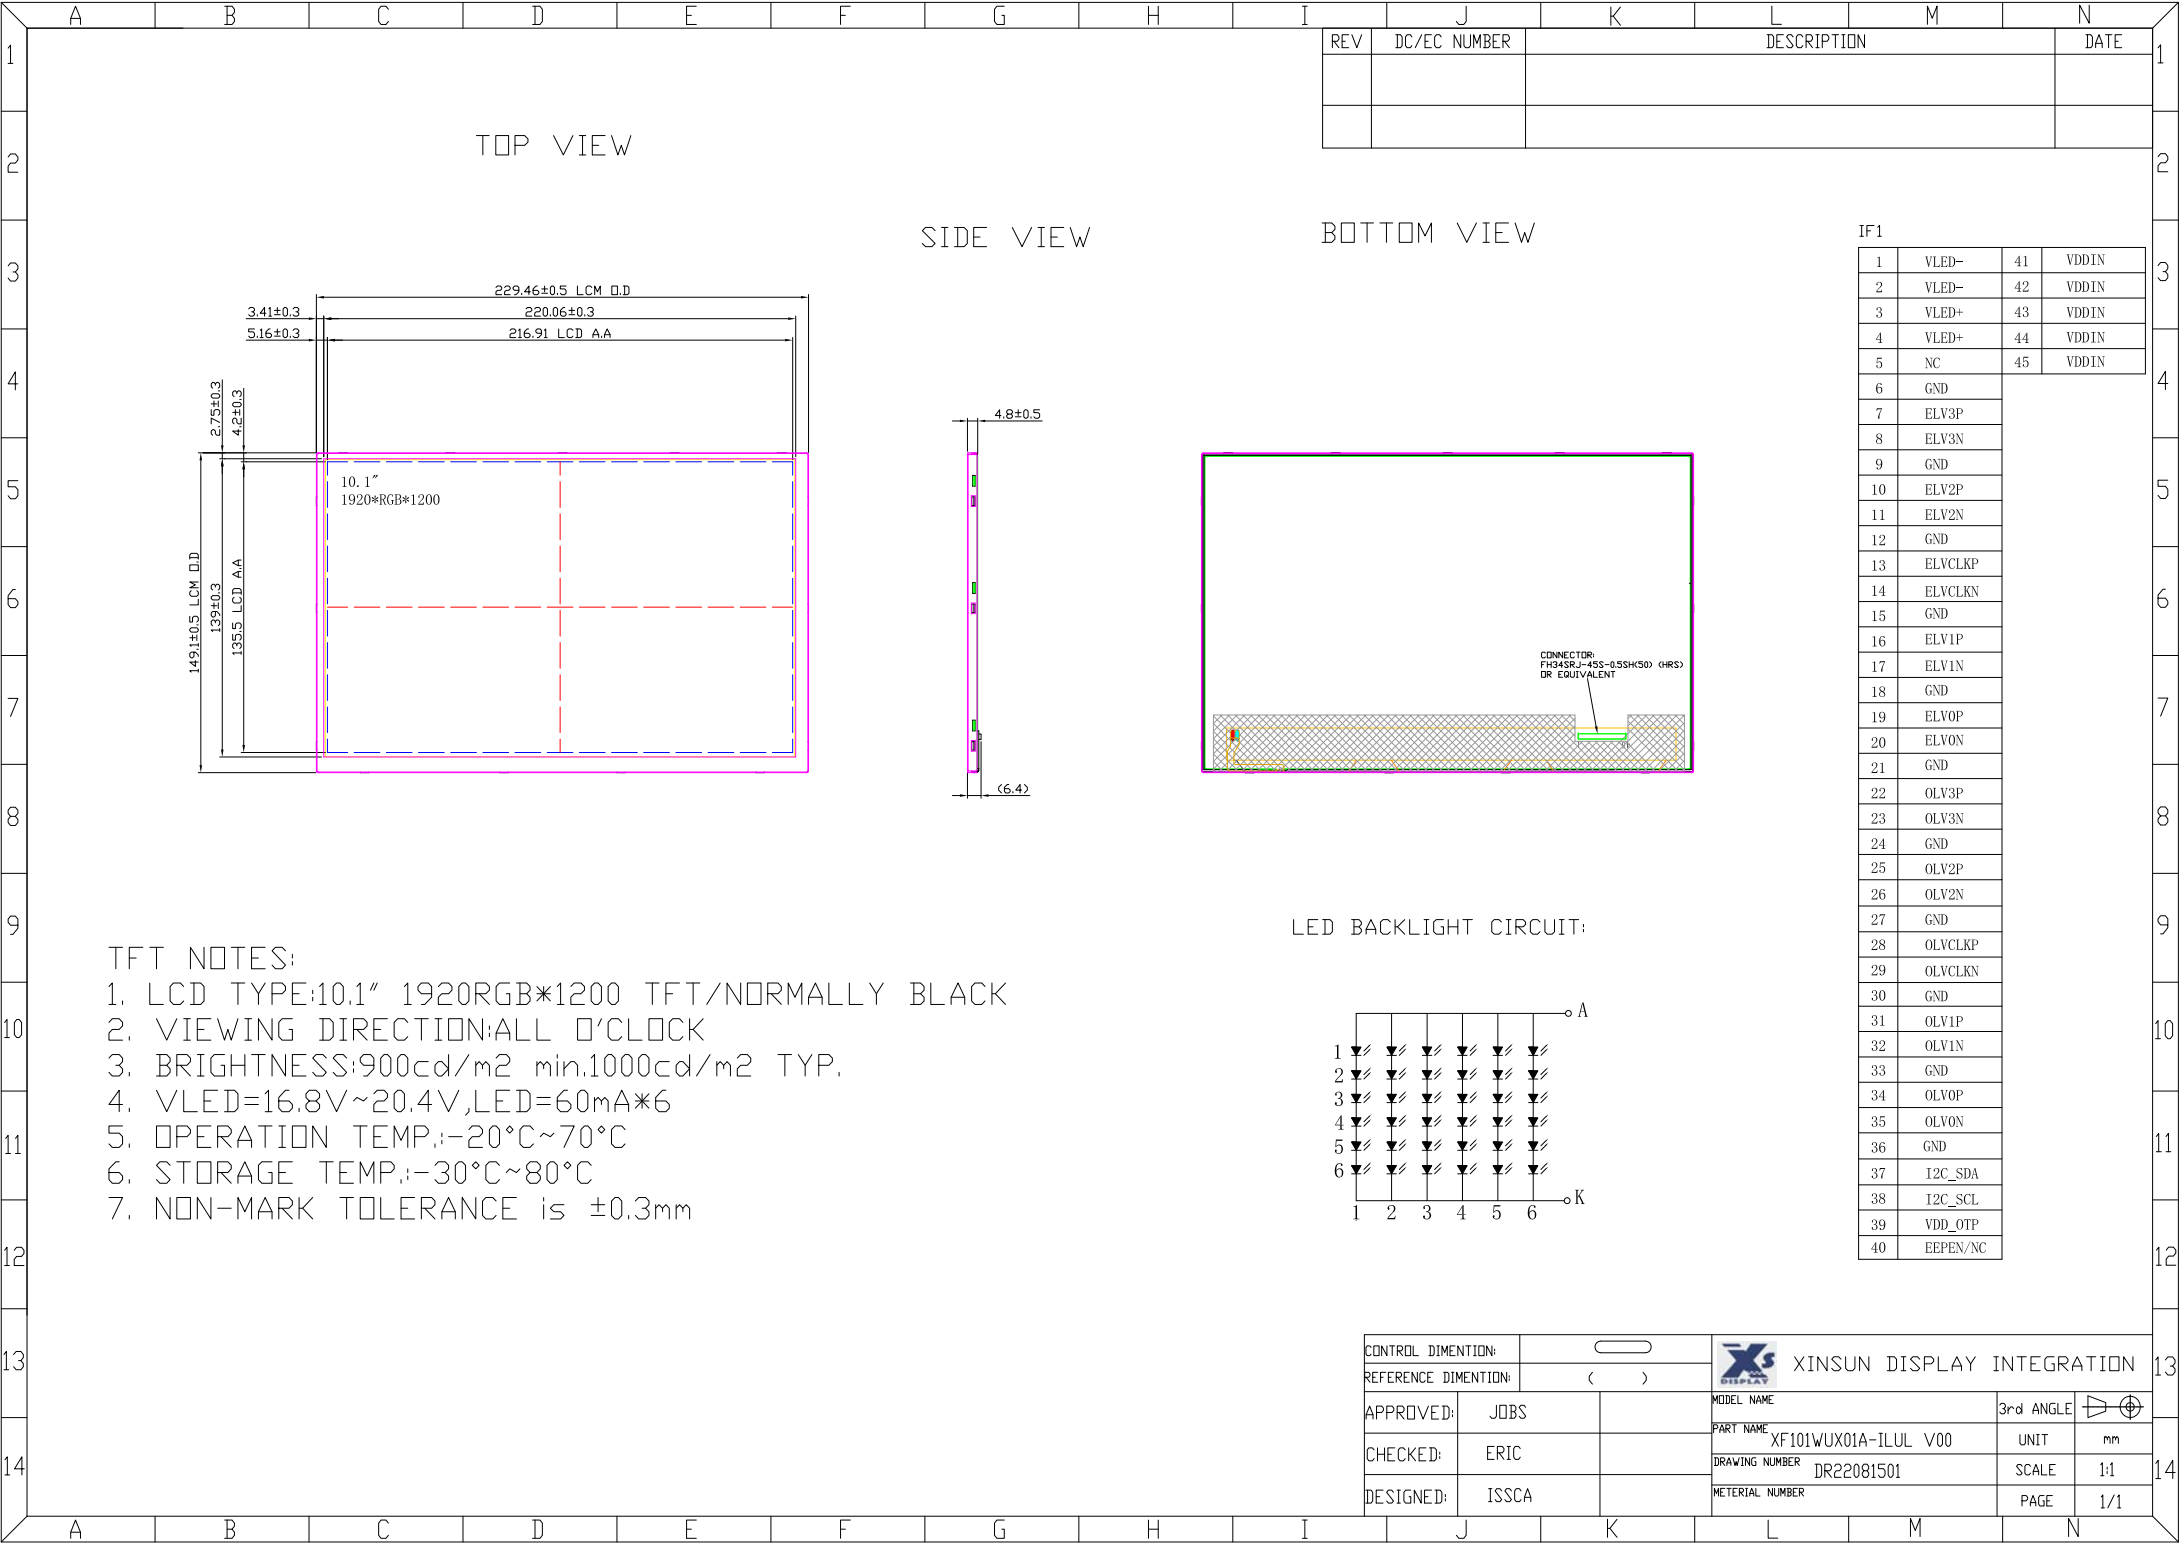

REV	DC/EC NUMBER	DESCRIPTION	DATE

TOP VIEW

SIDE VIEW


BOTTOM VIEW

IF1			
1	VLED-	41	VDDIN
2	VLED-	42	VDDIN
3	VLED+	43	VDDIN
4	VLED+	44	VDDIN
5	NC	45	VDDIN
6	GND		
7	ELV3P		
8	ELV3N		
9	GND		
10	ELV2P		
11	ELV2N		
12	GND		
13	ELVCLKP		
14	ELVCLKN		
15	GND		
16	ELV1P		
17	ELV1N		
18	GND		
19	ELV0P		
20	ELV0N		
21	GND		
22	OLV3P		
23	OLV3N		
24	GND		
25	OLV2P		
26	OLV2N		
27	GND		
28	OLVCLKP		
29	OLVCLKN		
30	GND		
31	OLV1P		
32	OLV1N		
33	GND		
34	OLV0P		
35	OLV0N		
36	GND		
37	I2C_SDA		
38	I2C_SCL		
39	VDD_OTP		
40	EEPEN/NC		

TFT NOTES:

1. LCD TYPE:10.1" 1920RGB*1200 TFT/NORMALLY BLACK
2. VIEWING DIRECTION:ALL O'CLOCK
3. BRIGHTNESS:900cd/m2 min.1000cd/m2 TYP.
4. VLED=16.8V~20.4V,LED=60mA*6
5. OPERATION TEMP.:-20°C~70°C
6. STORAGE TEMP.:-30°C~80°C
7. NON-MARK TOLERANCE is ±0.3mm

LED BACKLIGHT CIRCUIT:



CONTROL DIMENTION:		XINSUN DISPLAY INTEGRATION	
REFERENCE DIMENTION:	()	MODEL NAME	3rd ANGLE
APPROVED:	JOBS	PART NAME	UNIT
CHECKED:	ERIC	XF101WUX01A-ILUL V00	mm
DESIGNED:	ISSCA	DRAWING NUMBER	SCALE
		DR22081501	1:1
		METERIAL NUMBER	PAGE
			1/1