


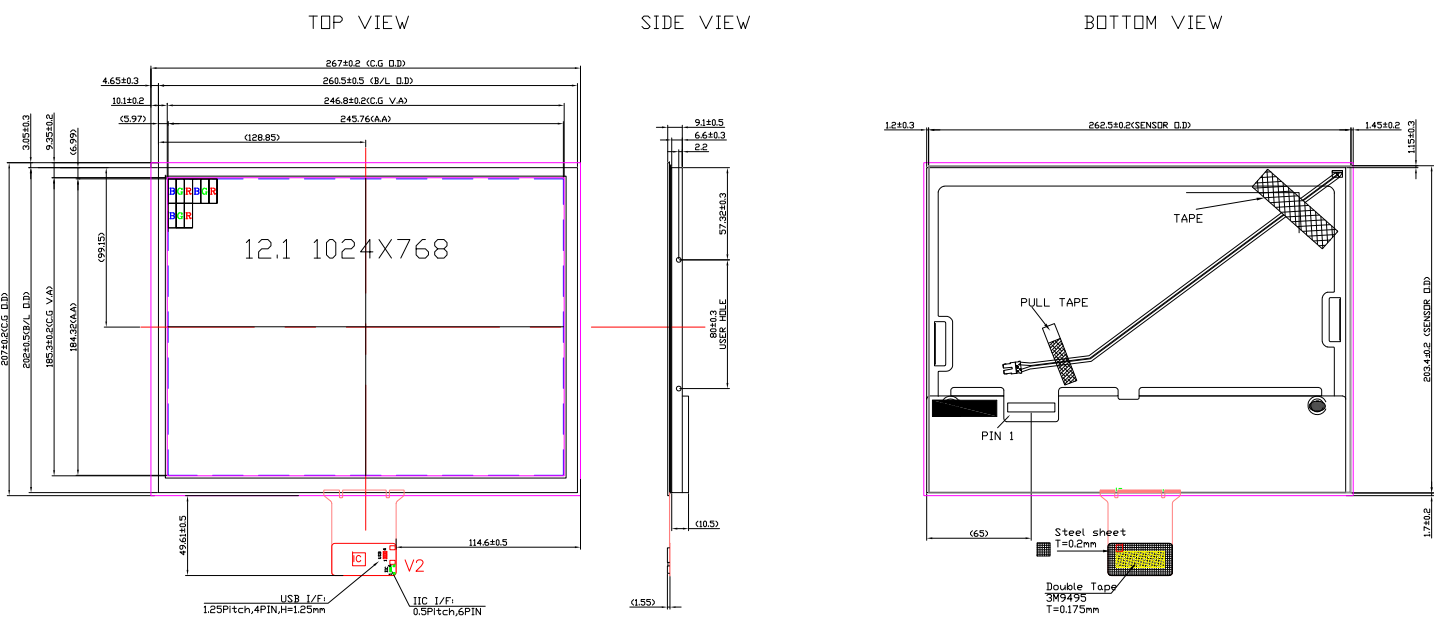


REV	DC/EC NUMBER	DESCRIPTION	DATE

USB(4PIN)		Interface for TFT	
PIN	Definition		
1	VBUS	1	VDD
2	D-	2	VDD
3	D+	3	VSS
4	GND	4	REV
IIC(6PIN)		5	RIN1-
PIN	Definition	6	RIN1+
1	RST	7	VSS
2	SDA	8	RIN2-
3	SCL	9	RIN2+
4	INT	10	VSS
5	VDD	11	RIN3-
6	GND	12	RIN3+
		13	VSS
		14	CLKIN-
		15	CLKIN+
		16	VSS
		17	RIN4-
		18	RIN4+
		19	SEL68
		20	Bist

- TFT NOTES:
- LCD TYPE : 12.1" TFT, TN, NORMALLY WHITE
 - VIEWING DIRECTION:
WIDE VIEWING 80/80/80/80
 - BRIGHTNESS: (a) 600cd/m² at ILED=600mA, VF=11.2V~14.4V WITHOUT CTP
(b) 510cd/m² at ILED=600mA, VF=11.2V~14.4V WITH CTP
 - OPERATION TEMP.: -20°C~70°C
 - STORAGE TEMP.: -30°C~80°C
 - NON-MARK TOLERANCE is ±0.3mm
 - ROHS CPMLAIN

- CTP NOTES:
- Structure: G+G;
 - Type: USB, IIC, ILI2511
 - Transmittance: ≥86%
 - Hardless: 6H with
 - Operating conditions: -10°C~+60°C, ≤85%RH
 - Storage conditions: -20°C~+70°C, ≤85%RH
 - Unspecified tolerance: ±0.2mm
 - All materials in the drawing comply with the ROHS

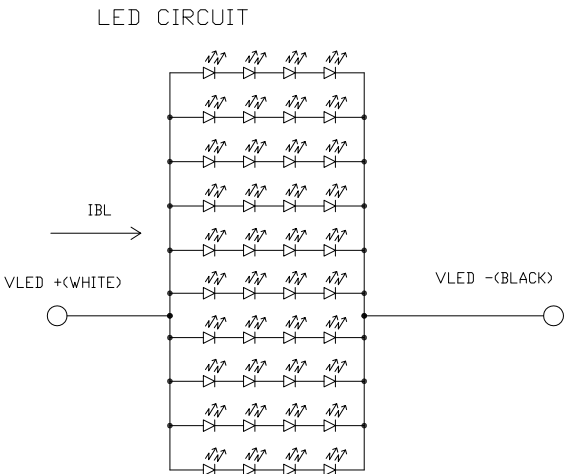

CONTROL DIMENTION:		XINSUN DISPLAY INTEGRATION			
REFERENCE DIMENTION:	()	MODEL NAME	3rd ANGLE		
APPROVED:	JOBS	PART NAME	XF121XGA03AC1-TLHL V01	UNIT	mm
CHECKED:	ERIC	DRAWING NUMBER		SCALE	1:1
DESIGNED:	ISSCA	MATERIAL NUMBER		PAGE	1/1