
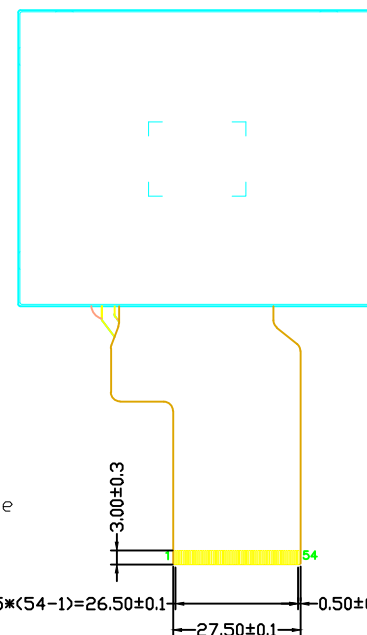
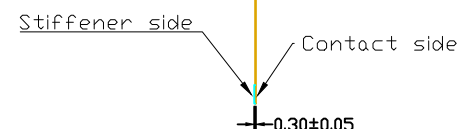


REV	DC/EC NUMBER	DESCRIPTION	DATE

TOP VIEW

SIDE VIEW

BOTTOM VIEW

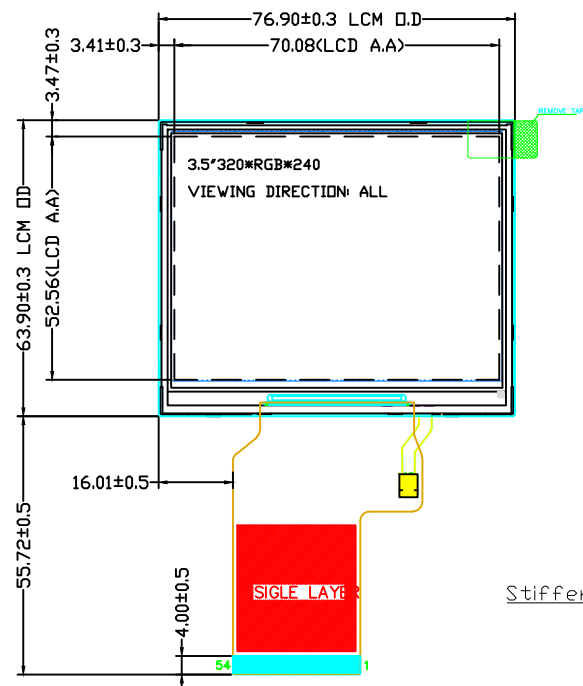


PIN	NAME	PIN	NAME
1	VBL-	31	R3
2	VBL-	32	R4
3	VBL+	33	R5
4	VBL+	34	R6
5	Y1/YU(NC)	35	R7
6	X1/XR(NC)	36	HSYNC
7	NC	37	VSYSN
8	RESET	38	DCLK
9	SPENA(CS)	39	NC
10	SPCLK(SCL)	40	NC
11	SPDAT(SDA)	41	VCC
12	B0	42	VCC
13	B1	43	Y2/YD
14	B2	44	X2/XL
15	B3	45	NC
16	B4	46	NC
17	B5	47	NC
18	B6	48	IF2(NC)
19	B7	49	IF1(NC)
20	G0	50	IF0(NC)
21	G1	51	NC
22	G2	52	DE
23	G3	53	GND
24	G4	54	GND
25	G5		
26	G6		
27	G7		
28	R0		
29	R1		
30	R2		

NOTES:

1. DISPLAY TYPE: a-Si TFT, IPS, NORMALLY BLACK
2. VIEWING DIRECTION: ALL O'CLOCK
3. LCD CONTROLLER: ST7272
4. BACKLIGHT: 6 WHITE LEDs series, VLED=16.8V~19.8V, ILED=20mA
(Unspecified. Adjust the number of LEDs according to the brightness)
5. BRIGHTNESS: 500cd/m²
6. OPERATING TEMP: -20°C~ +70°C
7. STORAGE TEMP: -30°C~ +80°C
8. UNMARKED TOLERANCE: ±0.2
9. RoHS Compliance

LED Circuit:



CONTROL DIMENSION:		XINSUN DISPLAY INTEGRATION	
REFERENCE DIMENSION:	()		
APPROVED:	JOBS	MODEL NAME	3rd ANGLE
CHECKED:	ERIC	PART NAME	UNIT
DESIGNED:	ISSCA	DRAWING NUMBER	SCALE
		MATERIAL NUMBER	PAGE