


REV	DC/EC NUMBER	DESCRIPTION	DATE

40 PIN FOR LCM


PinNO.	Symbol
1	GND
2	RXIN0-
3	RXIN0+
4	GND
5	RXIN1-
6	RXIN1+
7	GND
8	RXIN2-
9	RXIN2+
10	GND
11	RXCLKIN-
12	RXCLKIN+
13	GND
14	RXIN3-
15	RXIN3+
16~17	GND
18~19	NC
20	REFCLK/NC
21	SDA /NC
22	SCL /NC
23	IRQ
24	RESET
25	STBYB/NC
26	NC
27	GND
28~29	K
30	GND
31	NC
32~33	GND
34	NC
35~36	A
37	GND
38	VDD 3.3V
39	VDD 3.3V
40	NC

LED CIRCUIT DIAGRAM:




3*6=18EA If=120mA



TOP VIEW

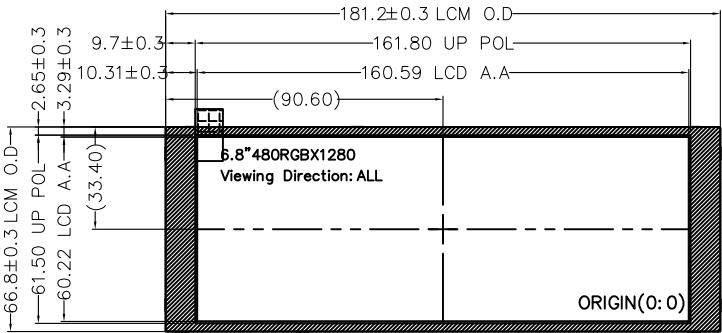

SIDE VIEW



BOTTOM VIEW

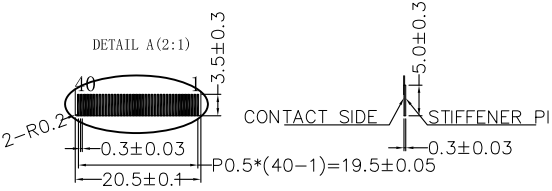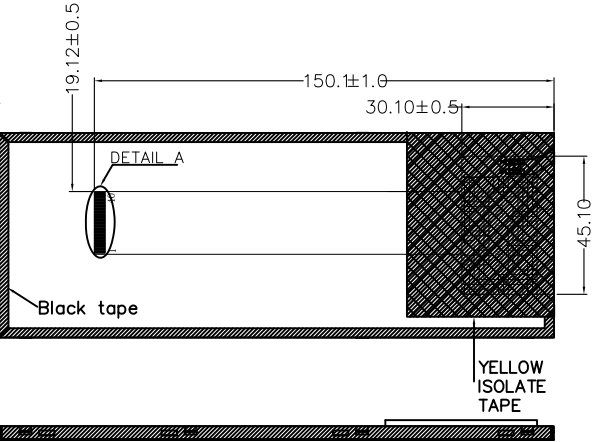

NOTES:

1. DISPLAY MODE : 6.8" TFT LCD, Transmissive, Normally Black.
2. SOURCE IC: EK79030AB2 or EQUIVALENT
3. VIEW DIRECTION: ALL
4. BACKLIGHT: 18CHIP-WHITE LED, ILED=120mA at VAK=8.4V~10.2V.
5. OPERATING TEMPERATURE: -20°C TO 70°C
STORAGE TEMPERATURE: -30°C TO 80°C
6. GENERAL TOLERANCE : ±0.20
7. BRIGHTNESS FOR TFT MODULE : 500cd/m² TYP.

CONTROL DIMENTION:		XINSUN DISPLAY INTEGRATION		
REFERENCE DIMENTION:	()			
APPROVED:	JOBS		MODEL NAME	3rd ANGLE
CHECKED:	ERIC		PART NAME	UNIT
DESIGNED:	ISSCA		DRAWING NUMBER	SCALE
			MATERIAL NUMBER	PAGE
				1/1