REV	DC/EC NUMBER	DESCRIPTION	DATE

TOP VIEW

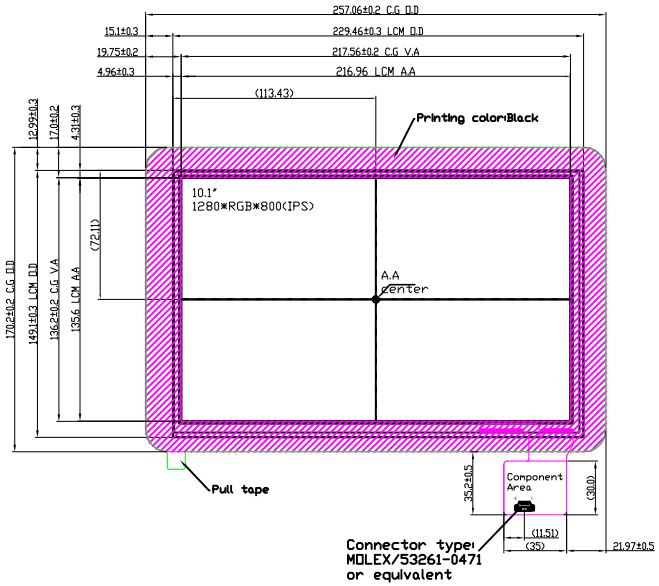

SIDE VIEW

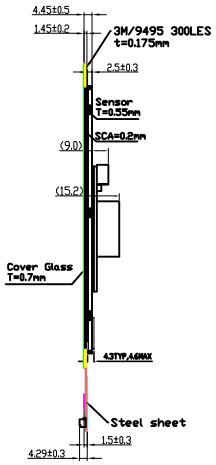

BACK VIEW

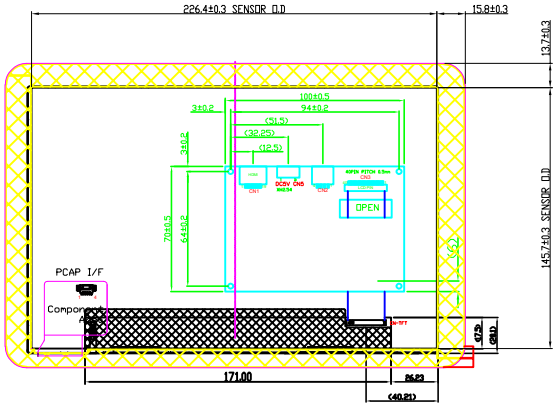

CN1: HDMI ASSIGNMENT

PIN	ASSIGNMENT
1	TMDS Data2+
2	TMDS Data2 Shield
3	TMDS Data2−
4	TMDS Data1+
5	TMDS Data1 Shield
6	TMDS Data1−
7	TMDS Data0+
8	TMDS Data0 Shield
9	TMDS Data0−
10	TMDS Clock+
11	TMDS Clock Shield
12	TMDS Clock−
13	CEC
14	NC
15	SCL
16	SDA
17	DDC/CEC Ground
18	+5V Power
19	Hot Plug Detect

CN−TFT
Interface for TFT

1	VCOM
2	VDD
3	VDD
4	NC
5	NC
6	NC
7	GND
8	RXIN0−
9	RXIN0+
10	GND
11	RXIN1−
12	RXIN1+
13	GND
14	RXIN2−
15	RXIN2+
16	GND
17	RXCLK−
18	RXCLK+
19	GND
20	RXIN3−
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	LED_PWM
28	NC
29	AVDD
30	GND
31	LEDK
32	LEDK
33	NC
34	NC
35	VGL
36	NC
37	CABC_EN
38	VGH
39	LEDA
40	LEDA

CN5 POWER SUPPLY

1	+5V
2	+5V
3	GND
4	GND
5	PWM

PCAP I/F

1	GND
2	USB−D+
3	USB−D−
4	+5V

TFT NOTE:
1. LCD TYPE : 10.1",1280RGB*800 ,TFT ,IPS
2. VIEWING DIRECTION:WIDE VIEWING 85/85/85/85
3. BACKLIGHT: 300cd/m^2 TYP.,50000HR,50% BRIGHTESS DECREASE
4. VLED=8.4V~10.2V,ILED=240mA
5. OPERATION TEMP.: -20°C~70°C
6. STORAGE TEMP.: -30°C~80°C
7. NON-MARK TOLERANCE is ±0.2mm
8. A.S. 16:10
9. CONTRAST = 600~800:1
10. COLOR DEPTH 16.7M

CTP NOTE:
1.POWER SUPPLY:DC5.0V,Interface:USB
2.PRECISION(%):+/-1.0mm@10mm
3.TOP:-20°C~+70°C
4.TST:-30°C~+80°C
5.TRANSMITTANCE:≥86%
6.STRUCTURE:COVER+ITO GLASS
7.IC:ILI2511 OR Equivalent
8.ROHS
9.UNMARKED TOLERANCE:±0.2

LED CIRCUIT

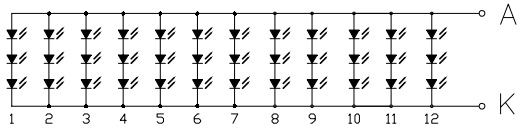

CONTROL DIMENTION:		
REFERENCE DIMENTION:	( )	
APPROVED:	JOBS	
CHECKED:	ERIC	
DESIGNED:	ISSCA	

XINSUN DISPLAY INTEGRATION

MODEL NAME		3rd ANGLE	
PART NAME	XF101WX07AC-IDNL V00	UNIT	mm
DRAWING NUMBER	DR21090201-1 V00	SCALE	1:1
METERIAL NUMBER		PAGE	1/1