


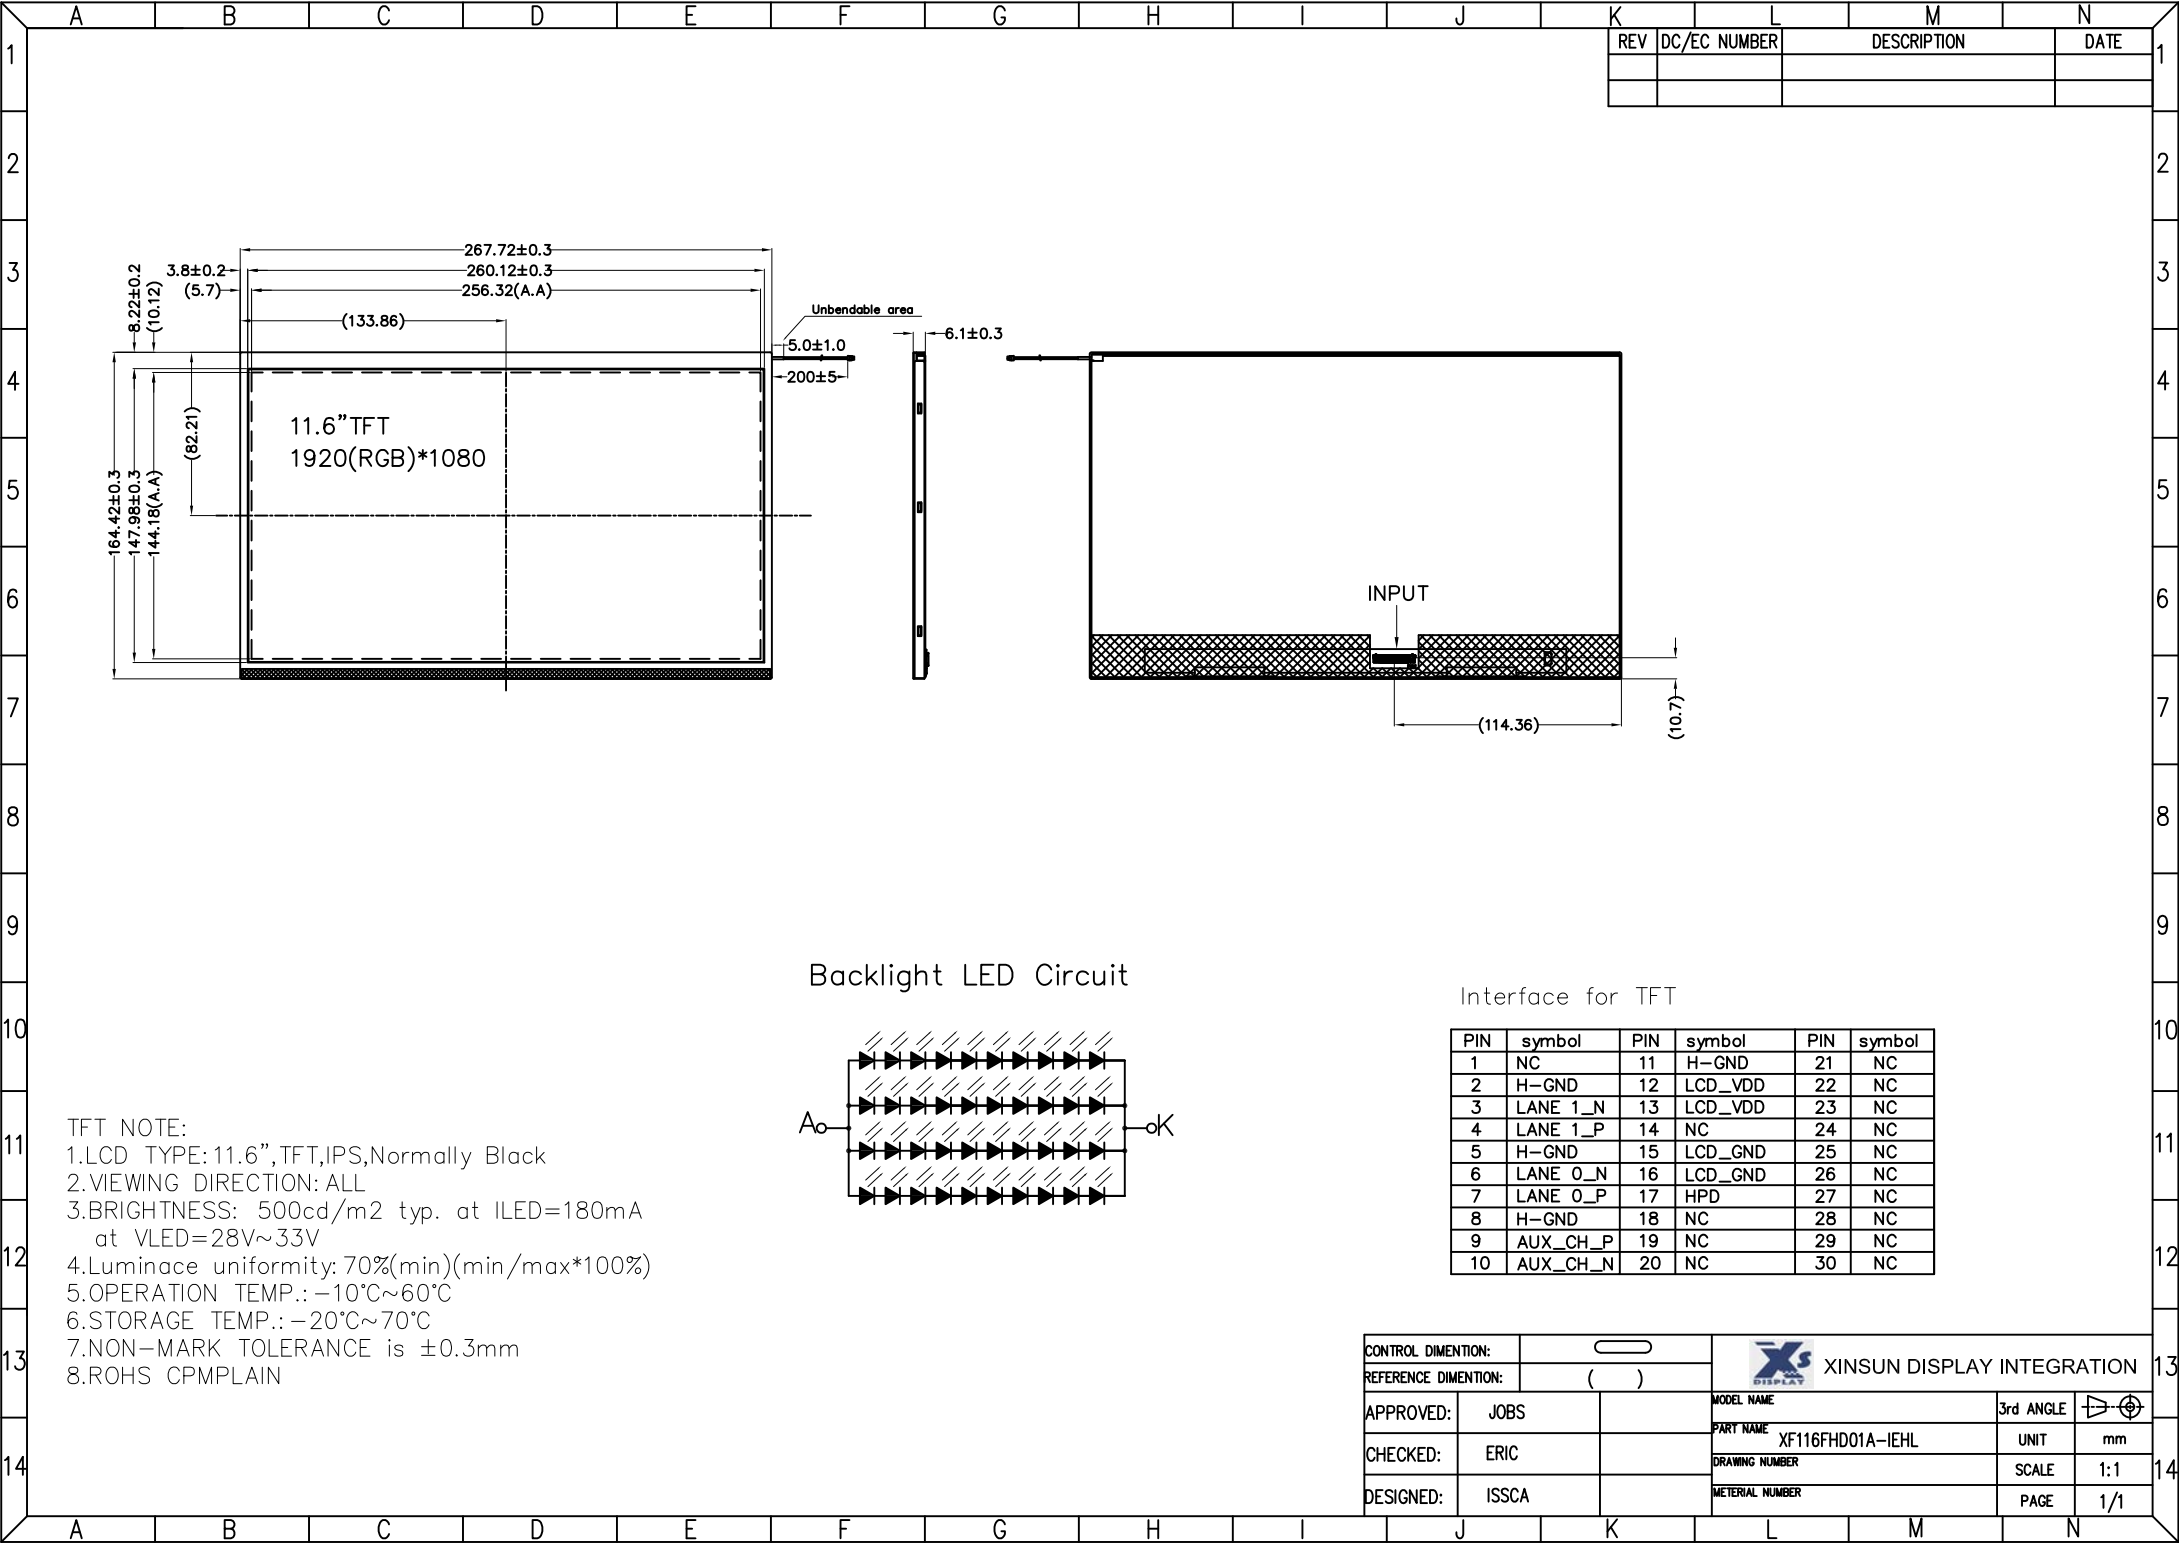


REV	DC/EC NUMBER	DESCRIPTION	DATE

11.6" TFT
1920(RGB)*1080

INPUT

Backlight LED Circuit

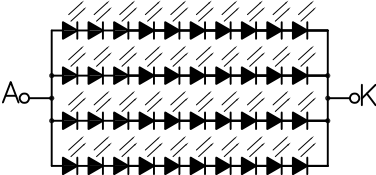

Interface for TFT

PIN	symbol	PIN	symbol	PIN	symbol
1	NC	11	H-GND	21	NC
2	H-GND	12	LCD_VDD	22	NC
3	LANE 1_N	13	LCD_VDD	23	NC
4	LANE 1_P	14	NC	24	NC
5	H-GND	15	LCD_GND	25	NC
6	LANE 0_N	16	LCD_GND	26	NC
7	LANE 0_P	17	HPD	27	NC
8	H-GND	18	NC	28	NC
9	AUX_CH_P	19	NC	29	NC
10	AUX_CH_N	20	NC	30	NC

TFT NOTE:
1.LCD TYPE: 11.6",TFT,IPS,Normally Black
2.VIEWING DIRECTION: ALL
3.BRIGHTNESS: 500cd/m2 typ. at ILED=180mA
at VLED=28V~33V
4.Luminace uniformity: 70%(min)(min/max*100%)
5.OPERATION TEMP.: -10°C~60°C
6.STORAGE TEMP.: -20°C~70°C
7.NON-MARK TOLERANCE is ±0.3mm
8.ROHS CPMPPLAIN

CONTROL DIMENTION:		Xs XINSUN DISPLAY INTEGRATION			
REFERENCE DIMENTION:					
APPROVED:	JOB	MODEL NAME	XF116FHD01A-IEHL	3rd ANGLE	30°
CHECKED:	ERIC	PARTY NAME		UNIT	mm
DESIGNED:	ISSCA	DRAWING NUMBER		SCALE	1:1
		METERIAL NUMBER		PAGE	1/1