




TOP VIEW

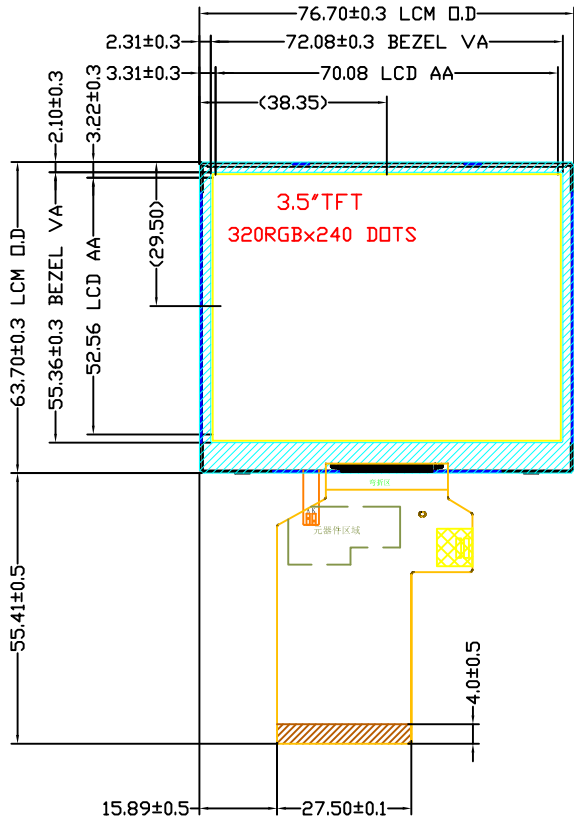


SIDE VIEW

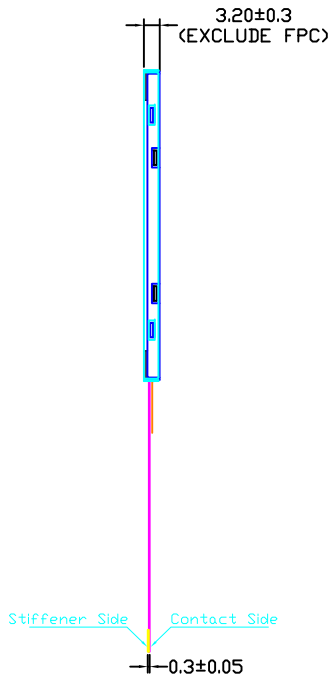

BOTTOM VIEW

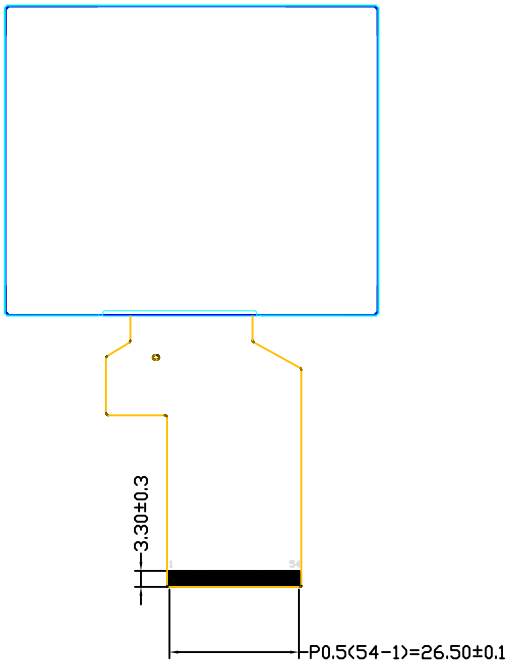

BACKLIGHT CIRCUIT DIAGRAM



REV	DC/EC NUMBER	DESCRIPTION	DATE

PIN DESCRIPTION	
PIN	SYMBOL
1-2	LEDK
3-4	LEDA
5-7	NC
8	RESET
9	CS
10	SCL
11	SDI
12-19	B0-B7
20-27	G0-G7
28-35	R0-R7
36	HSYNC
37	VSYSN
38	DCLK
39-40	NC
41-42	VDD
43	NC
44-45	NC
46	NC
47	NC
48-51	NC
52	ENB
53-54	GND

NOTES:

- DISPLAY TYPE: a-Si TFT
- VIEWING DIRECTION: 6:00(Gray scale invetion)
- POLARIZER MODE: TRANSMISSIVE/NW
- LCD CONTROLLER: HX8238D
- VDD: 3.3V
- BACKLIGHT: 6 WHITE LEDs series,VLED=16.8V~20.4V,ILED=20mA
- BRIGHTNESS: 300cd/m2 typ.
- OPERATING TEMP.: -20°C- +70°C
- STORAGE TEMP.: -30°C- +80°C
- UNMARKED TOLERANCE: ±0.2
- RoHS Compliance

CONTROL DIMENTION:		XINSUN DISPLAY INTEGRATION			
REFERENCE DIMENTION:		()			
APPROVED:	JOBS	MODEL NAME	XF035QV01A-TTNL V00	3rd ANGLE	
CHECKED:	ERIC	PART NAME	DR22052601 V00	UNIT	mm
DESIGNED:	ISSCA	DRAWING NUMBER	SCALE	1:1	
		MATERIAL NUMBER	PAGE	1/1	