



REV	DC/EC NUMBER	DESCRIPTION	DATE

PIN FUNCTION

PIN	description
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	NC(XR)
38	NC(YD)
39	NC(XL)
40	NC(YU)

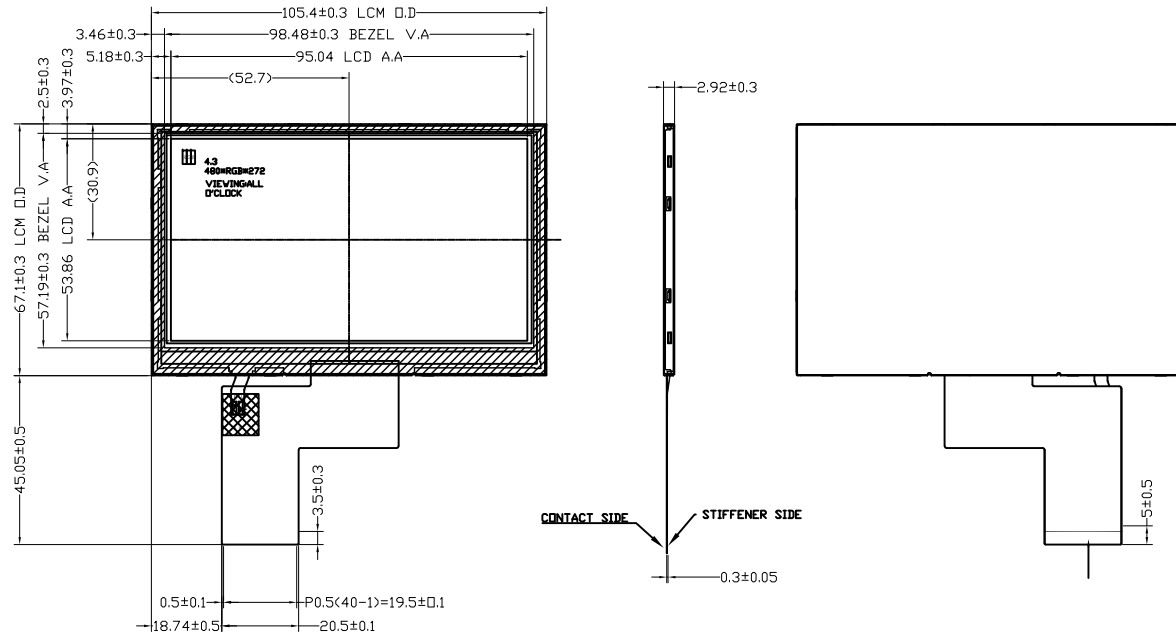

BACKLIGHT CIRCUIT



$V_f=14.0V\sim 17V, I_f=40mA$

NOTE:

- 1.MODULUE BRIGHTNESS: 350cd/m² TYP.
- 2.DISPLAY TYPE:4.3" TFT, TRANSMISSIVE, NORMAL BLACK
- 3.DRIVER IC: ST7283 OR EQUIVALENT
- 4.VIEWING DIRECTION: ALL
- 5.OPERATING TEMPERATURE:-20°C~+70°C.
- 6.STORAGE TEMPERATURE:-30°C~+80°C.
- 7.BACKLIGHT TYPE:10 WHITE LEDS
 $I_f=40.0mA/LED$ (CONSTANT CURRENT), $V_f=14.0V\sim 17.0V$
- 8.ROHS COMPLIANCE

CONTROL DIMENTION:		XINSUN DISPLAY INTEGRATION	
REFERENCE DIMENTION:		XINSUN DISPLAY INTEGRATION	
APPROVED:	JOBS	MODEL NAME	3rd ANGLE
CHECKED:	ERIC	PART NAME	UNIT
DESIGNED:	ISSCA	DRAWING NUMBER	SCALE
		MATERIAL NUMBER	PAGE
			1/1