



REV	DC/EC NUMBER	DESCRIPTION	DATE


TOP VIEW

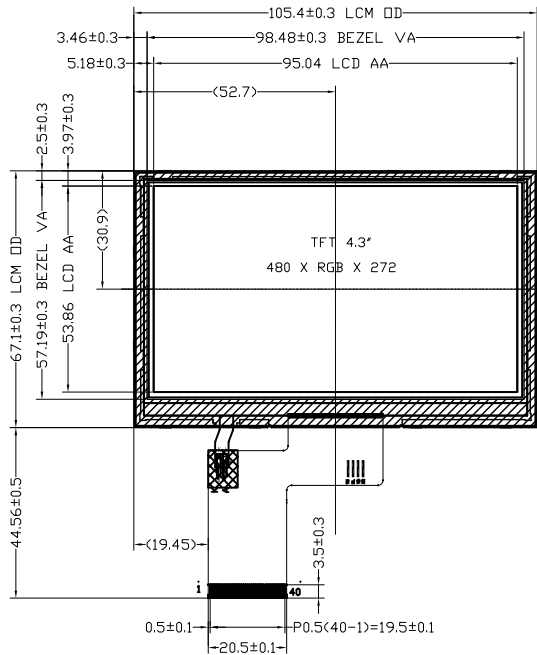

SIDE VIEW

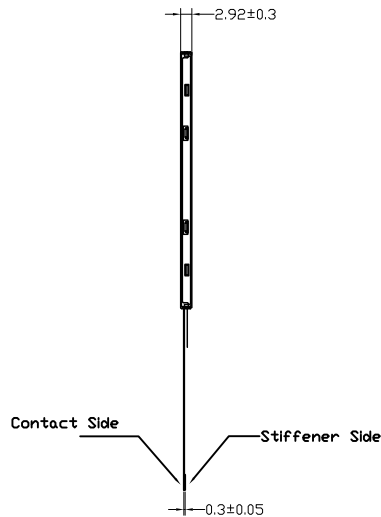

BOTTOM VIEW

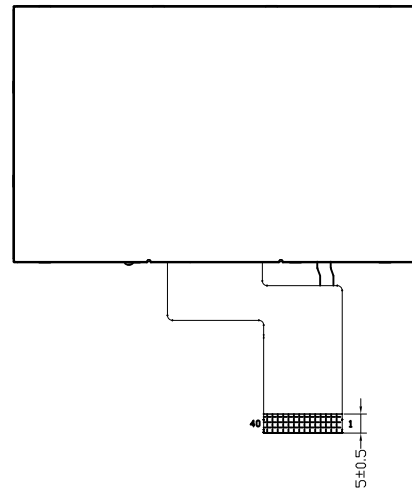

PIN FUNCTION

PIN	description
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	NC(XR)
38	NC(YD)
39	NC(XL)
40	NC(YU)

BACKLIGHT DIAGRAM



VLED:14.0~17.0V,ILED=40mA

NOTE:

1. MODULE BRIGHTNESS: 500cd/m2 typ.
2. DISPLAY TYPE: 4.3" TN TFT, TRANSMISSIVE
3. DRIVER IC: NV3047E OR Equivalent
4. VIEWING DIRECTION: 12'CLOCK
5. OPERATING TEMPERATURE: -20°C~+70°C.
6. STORAGE TEMPERATURE: -30°C~+80°C.
7. BACKLIGHT TYPE: 10 WHITE LEDS.
8. LED: ILED=40mA at VF=14~17V (CONSTANT CURRENT).
9. MUST MEET THE REQUIREMENT OF ROHS

CONTROL DIMENTION:		Xs DISPLAY	XINSUN DISPLAY INTEGRATION	
REFERENCE DIMENTION:	()			
APPROVED:	JOBS	MODEL NAME	3rd ANGLE	
CHECKED:	ERIC	PART NAME	UNIT	
DESIGNED:	ISSCA	DRAWING NUMBER	SCALE	
		MATERIAL NUMBER	PAGE	
			1/1	