



K		L		M		N	
REV	DC/EC NUMBER	DESCRIPTION				DATE	


TOP VIEW

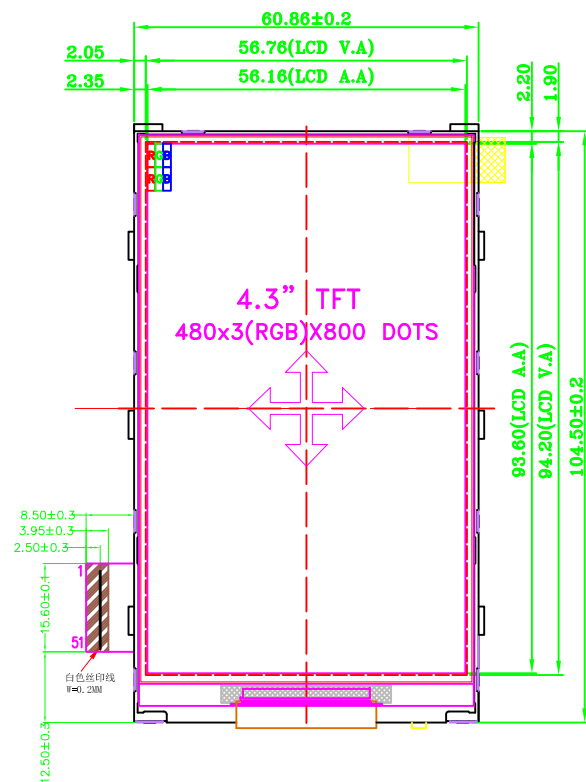

SIDE VIEW

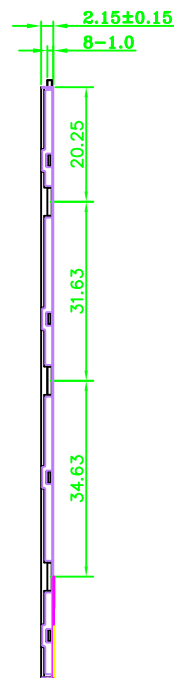

BOTTOM VIEW

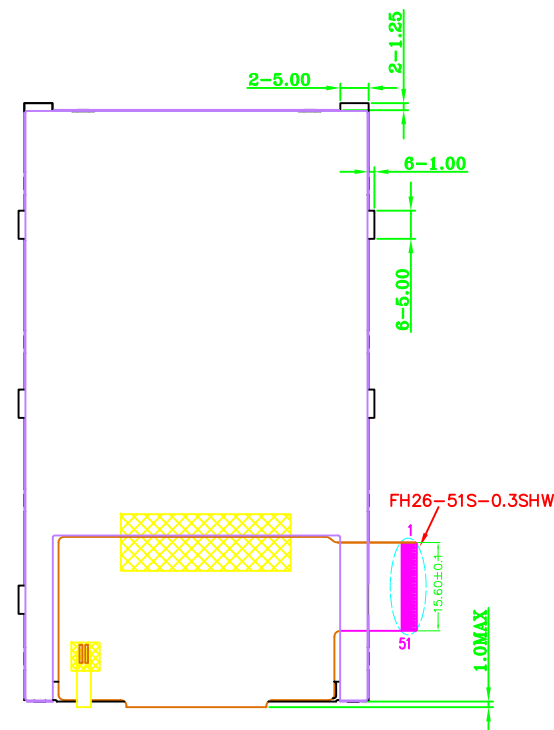

PIN ASSIGNMENT			
PIN	NAME	PIN	NAME
1	LED-	27	DB13
2	LED+	28	DB12
3	NC	29	DB11
4	NC	30	DB10
5	NC	31	DB9
6	NC	32	DB8
7	GND	33	DB7
8	VCI	34	DB6
9	NC	35	DB5
10	IDVCC	36	DB4
11	TE	37	DB3
12	SDO	38	DB2
13	SDI	39	DB1
14	/WR_RS	40	DB0
15	/CS	41	ENABLE
16	/RESET	42	DOTCLK
17	DB23	43	HSYN
18	DB22	44	VSYN
19	DB21	45	NC
20	DB20	46	NC
21	DB19	47	RS_SC
22	DB18	48	/RD
23	DB17	49	IM0
24	DB16	50	IM3
25	DB15	51	GND
26	DB14		



BL CIRCUIT DIAGRAM

NOTES:

- 1.DISPLAY TYPE: 4.3" TFT/IPS
- 2.VIEWING DIRECTION: 80/80/80/80 deg(U/D/L/R @ C/R>10)
- 3.LCD DRIVE IC: HX8369A
- 4.POLARIZER MODE: TRANSMISSIVE/NEGATIVE
- 5.OPERATING TEMP: -20° C~+70° C
- 6.STORAGE TEMP: -30° C~+80° C
- 7.UNMARKER TOLERANCE: ±0.20
- 8.REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

CONTROL DIMENTION:					XINSUN DISPLAY INTEGRATION		
REFERENCE DIMENTION:		()					
APPROVED:	JOBS		MODEL NAME	3rd ANGLE			
CHECKED:	ERIC		PART NAME XF043WV01A-IHNL	UNIT	mm		
DESIGNED:	ISSCA		DRAWING NUMBER	SCALE	1:1		
			MATERIAL NUMBER	PAGE	1/1		