


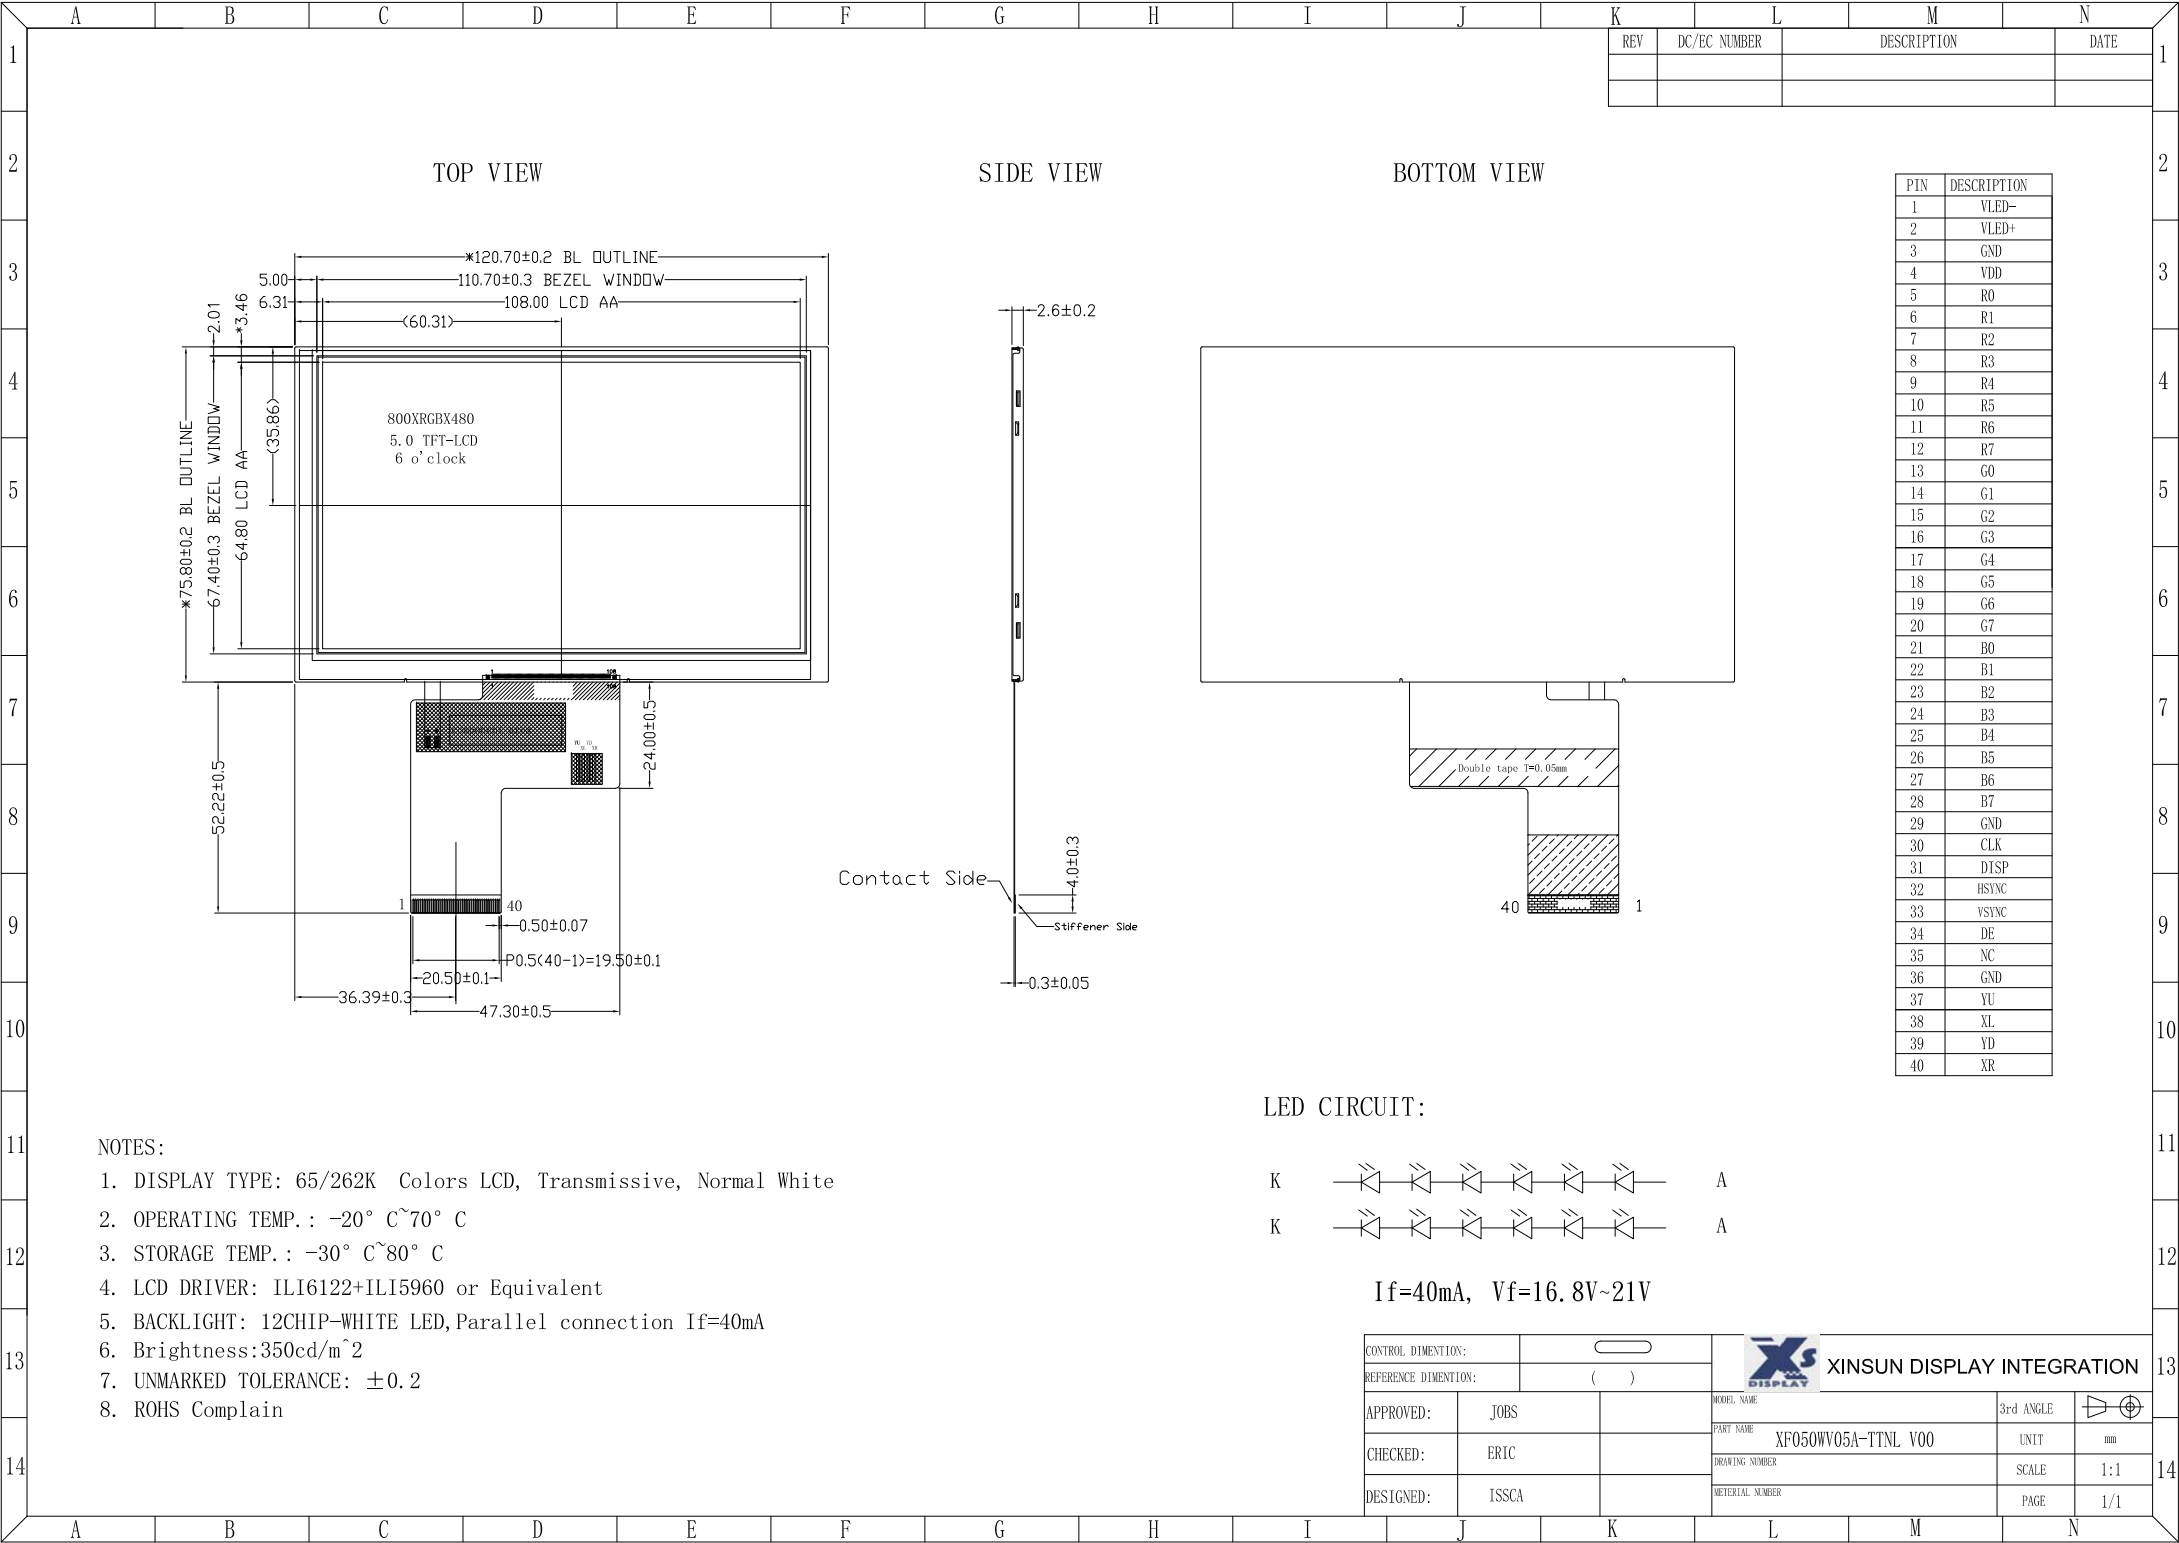

TOP VIEW


SIDE VIEW

BOTTOM VIEW

PIN	DESCRIPTION
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	YU
38	XL
39	YD
40	XR

- NOTES:
- 1. DISPLAY TYPE: 65/262K Colors LCD, Transmissive, Normal White
 - 2. OPERATING TEMP.: -20° C~70° C
 - 3. STORAGE TEMP.: -30° C~80° C
 - 4. LCD DRIVER: ILI6122+ILI5960 or Equivalent
 - 5. BACKLIGHT: 12CHIP-WHITE LED,Parallel connection If=40mA
 - 6. Brightness:350cd/m²
 - 7. UNMARKED TOLERANCE: ±0.2
 - 8. ROHS Complain

LED CIRCUIT:



If=40mA, Vf=16.8V~21V

CONTROL DIMENTION:				XINSUN DISPLAY INTEGRATION	
REFERENCE DIMENTION:		()			
APPROVED:	JOB	MODEL NAME		3rd ANGLE	
CHECKED:	ERIC	PART NAME		UNIT	mm
DESIGNED:	ISSCA	DRAWING NUMBER		SCALE	1:1
		METERIAL NUMBER		PAGE	1/1