


TFT I/FCTP I/F

TFT NOTE:

1. LCD TYPE:16.7M COLOR ,TFT:TN,TRANSMISSIVE,NORMAL WHITE
2. VIEWINGDIRECTION:70°U/50°D/70°L/70°R
3. Driver IC:EK9713+EK73003 or equivalent
4. BACKLIGHT:VF=8.4V~10.2V,IF=180mA(FIX)
5. Brightness:300cd/m2 TYP.
6. DPERATION TEMP:-20°~70°
7. STORAGE TEMP:-30°~80°
8. UNMARKERTOLERANCE:±0.2

- 1.POWER SUPPLY:DC=2.8~3.3V,Interface:I2C
- 2.SURFACE HARDNESS:6H
- 3.TOP:-20°C~+70°C
- 4.TST:-30°C~+80°C
- 5.TRANSMITTANCE:≥85%
- 6.STRUCTURE:COVER+ITO GLASS
- 7.IC:GT9271
- 8.RDHS
- 9.UNMARKED TOLERANCE:±0.2

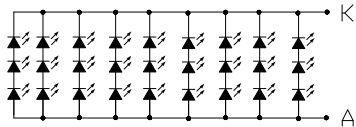

CONTROL DIMENTION:				XINSUN DISPLAY INTEGRATION	
REFERENCE DIMENTION:					
APPROVED:	JOBS		MODEL NAME	3rd ANGLE	
CHECKED:	ERIC		PART NAME	XF070WV07AC-TTNL	UNIT mm
			DRAWING NUMBER	DR22041501-1 V00	SCALE 1:1
DESIGNED:	ISSCA		MATERIAL NUMBER	PAGE	1/1