



REV	DC/EC NUMBER	DESCRIPTION	DATE


TOP VIEW

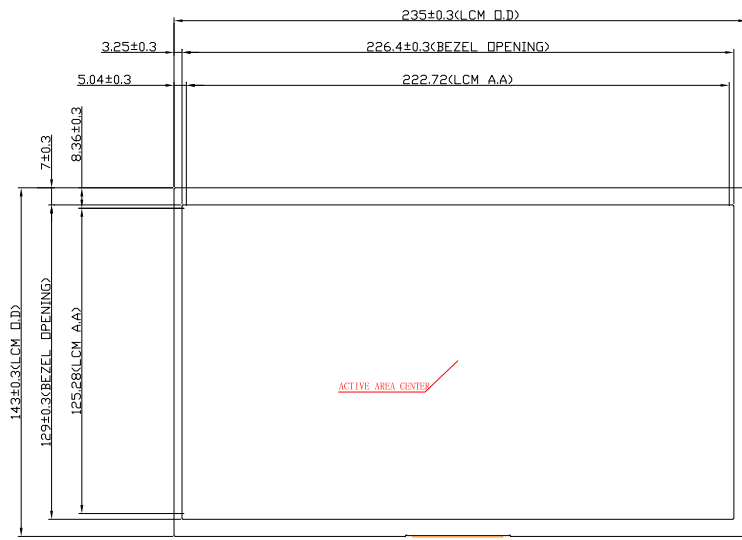

SIDE VIEW



BOTTOM VIEW

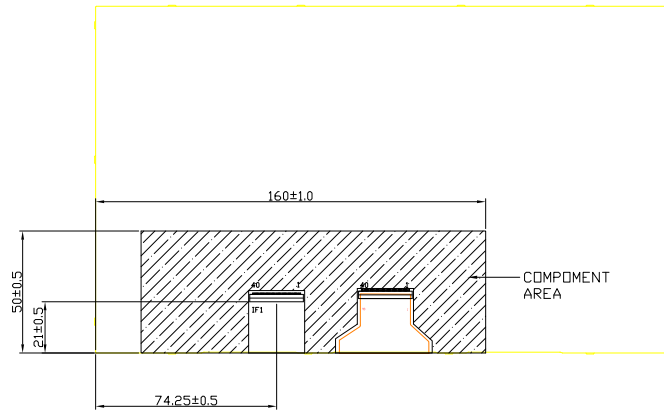

IF1

1	NC
2	VDD
3	VDD
4	NC
5	NC
6	NC
7	NC
8	RXIN0-
9	RXIN0+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLK-
18	RXCLK+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	GND
29	NC
30	NC
31	GND
32	GND
33	GND
34	NC
35	PWM
36	LED-ENABLE
37	NC
38	VLED
39	VLED
40	VLED

TFT NOTES:

1. LCD TYPE:10.1" 1024RGB*600 TFT/TN TYPE
2. VIEWING DIRECTION:6 O'CLOCK
3. BRIGHTNESS:300cd/m2 TYP.
4. VLED=12.0V,P=7.0W max
5. OPERATION TEMP.:-20°C~70°C
6. STORAGE TEMP.:-30°C~80°C
7. NON-MARK TOLERANCE is ±0.3mm

CONTROL DIMENTION:		XINSUN DISPLAY INTEGRATION		
REFERENCE DIMENTION:	()			
APPROVED:	JOBS	MODEL NAME	3rd ANGLE	
CHECKED:	ERIC	PART NAME		UNIT
DESIGNED:	ISSCA	DRAWING NUMBER		SCALE
		MATERIAL NUMBER		PAGE
			1/1	