

REV	DC/EC NUMBER	DESCRIPTION	DATE



TFT I/F

PIN	ASSIGNMENT
1	GND
2	GND
3	NC
4	VCC
5	VCC
6	VCC
7	VCC
8	NC
9	DE
10	GND
11	GND
12	GND
13	B5
14	B4
15	B3
16	GND
17	B2
18	B1
19	B0
20	GND
21	G5
22	G4
23	G3
24	GND
25	G2
26	G1
27	G0
28	GND
29	R5
30	R4
31	R3
32	GND
33	R2
34	R1
35	R0
36	GND
37	GND
38	DCLK
39	GND
40	GND


FRONT VIEW

SIDE VIEW

BACK VIEW

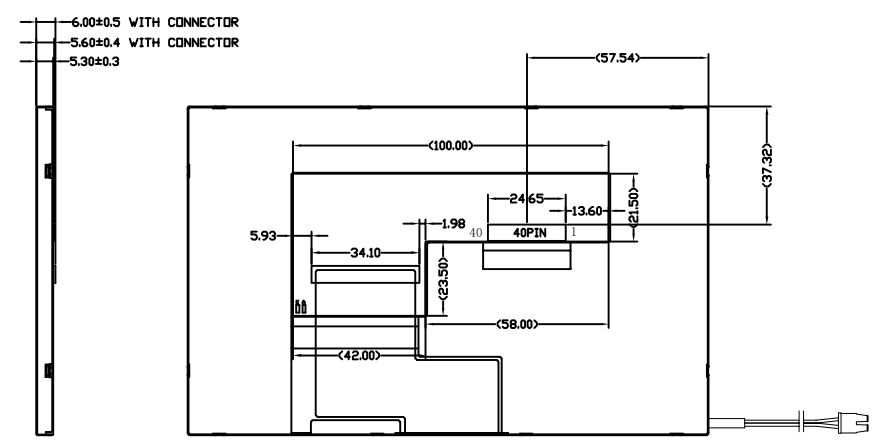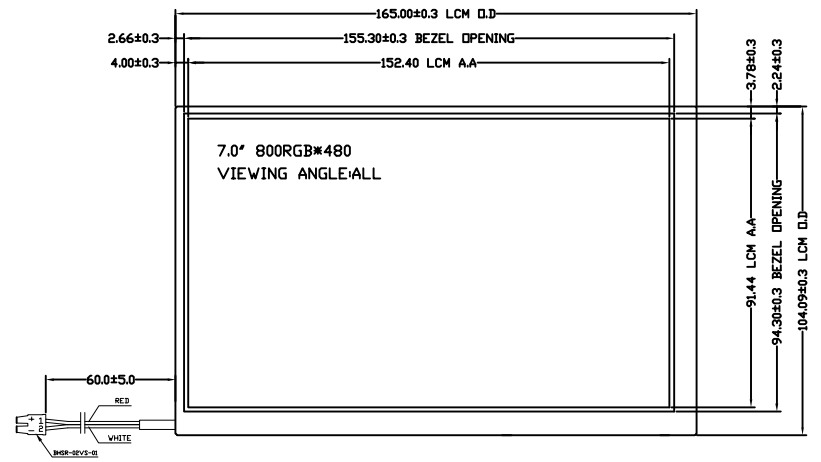

LED CIRCUIT



TFT NOTE:
1. LCD TYPE:TFT:IPS,TRANSMISSIVE,NORMAL BLACK
2. VIEWINGDIRECTION:80°U/80°D/80°L/80°R
3. BACKLIGHT:VLED=3.1V~3.5V,PLED=1.7W
4. Brightness:300cd/m2 TYP.
5. DPERATION TEMP:-20°C~70°C
6. STORAGE TEMP:-30°C~80°C
7. UNMARKERTOLERANCE:±0.2

VF=8.4V~10.5V, IF=160mA(Fix)

CONTROL DIMENSION:					
REFERENCE DIMENSION:	()				
APPROVED:	JOBS	MODEL NAME	3rd ANGLE		
CHECKED:	ERIC	PART NAME	UNIT	mm	
DESIGNED:	ISSCA	DRAWING NUMBER	SCALE	1:1	
		MATERIAL NUMBER	PAGE	1/1	